




VentAHead®

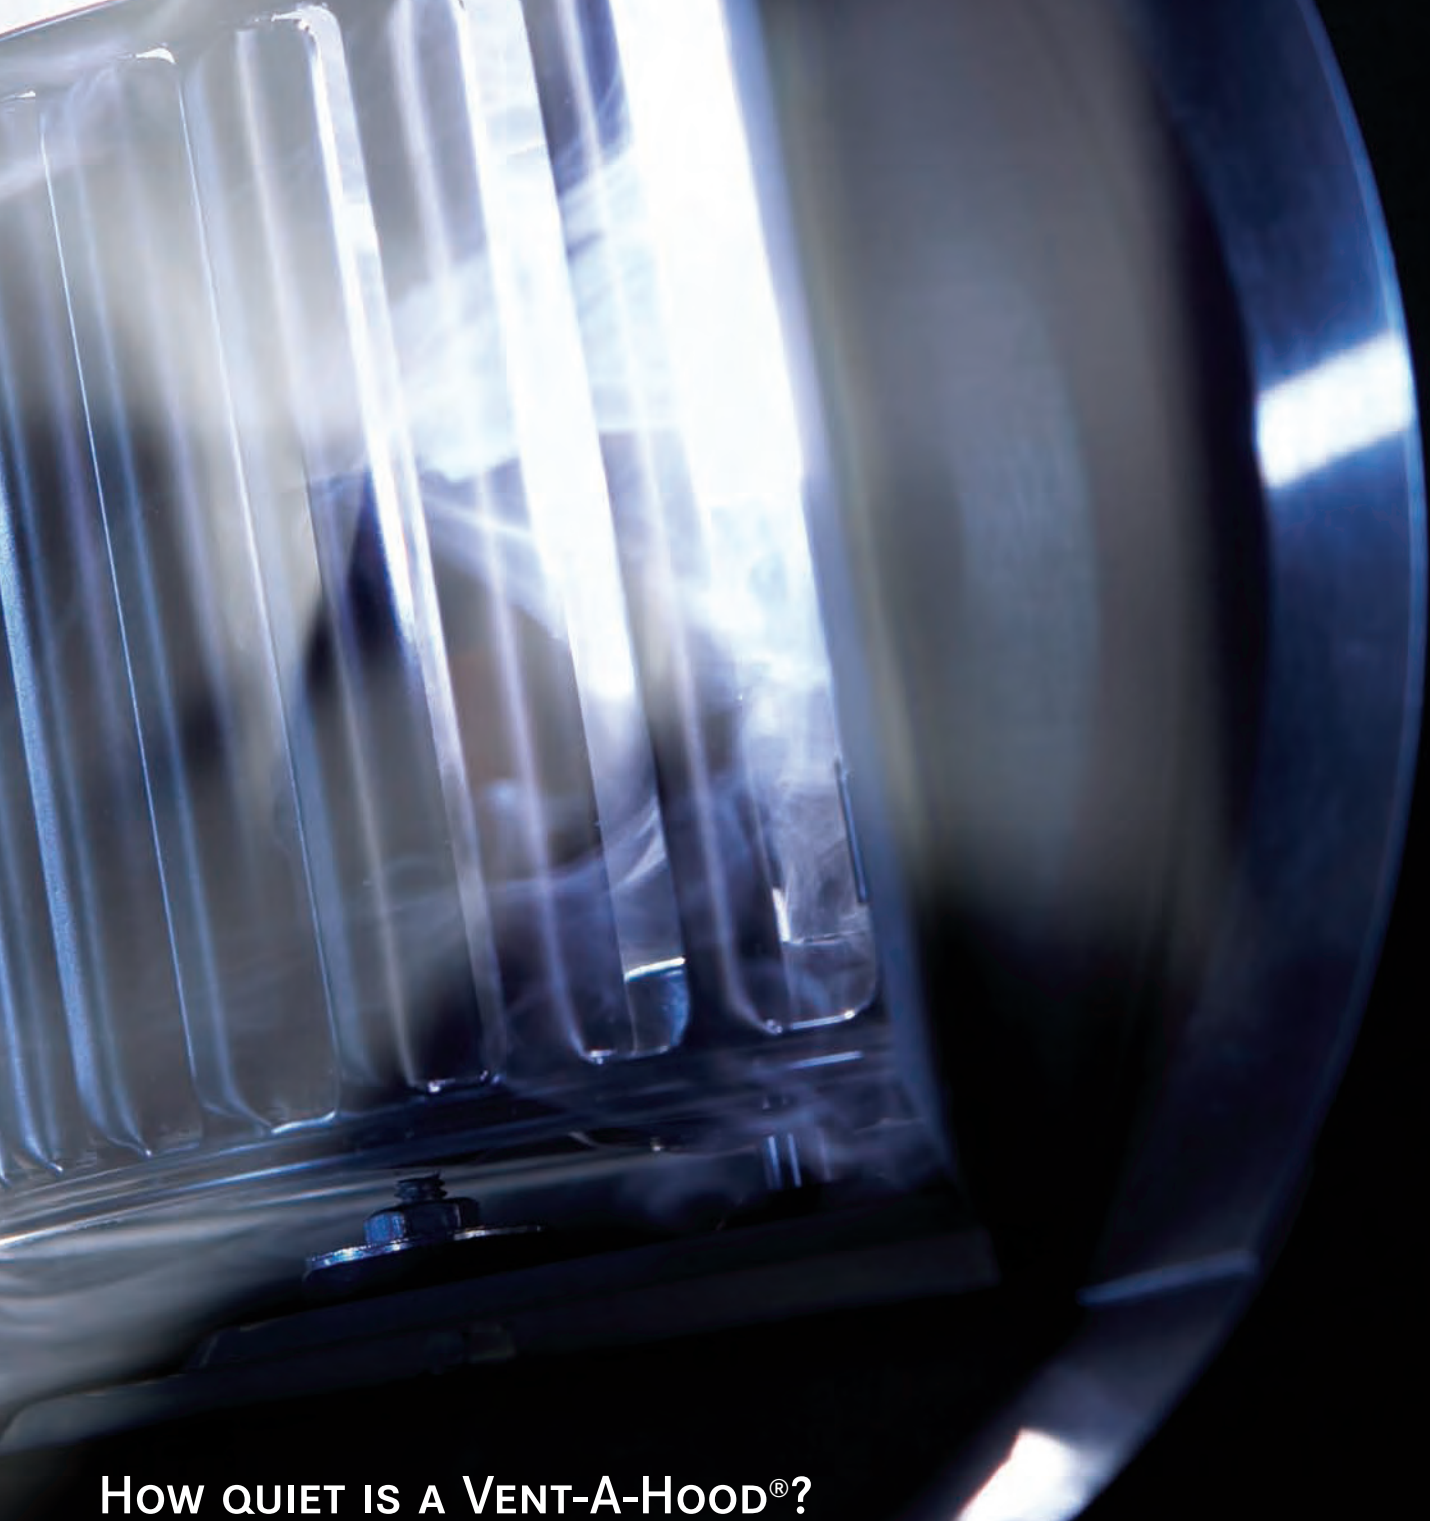

WHAT MAKES A VENT-A-HOOD® A VENT-A-HOOD®?

QUIET.

TURN ON A VENT-A-HOOD® RANGE HOOD, AND YOU'LL HEAR ONLY A WHISPER OF AIR MOVEMENT, BECAUSE THE MAGIC LUNG® BLOWER SYSTEM PROVIDES THE QUIETEST VENTILATION AVAILABLE. UNBIASED TESTS SHOW THAT THE MAGIC LUNG® BLOWER HAS ONE OF THE LOWEST SOUND RATINGS IN THE INDUSTRY – ESPECIALLY AT HIGH SPEED – WHERE IT COUNTS.

EFFICIENT.

THE POWERFUL MAGIC LUNG® BLOWER TRAPS COOKING CONTAMINANTS, LIQUIFIES GREASE VAPOR AND REMOVES HEAT POLLUTED AIR. IT COMBINES SUFFICIENT AIR PRESSURE AND CONSTANT SPEED CENTRIFUGAL FILTRATION – AND BECAUSE IT DOESN'T PULL AIR THROUGH A FILTER – IT PROVIDES THE MOST EFFICIENT KITCHEN VENTILATION AVAILABLE TODAY. THIS FILTRATION SYSTEM, ALONG WITH THE OPEN CANOPY DESIGN OF A VENT-A-HOOD®, DELIVERS PERFORMANCE FAR MORE EFFICIENTLY THAN OTHER FILTRATION SYSTEMS. WHEN COMPARING THE MAGIC LUNG® TO OTHER MANUFACTURERS, USE THE EQUIVALENT CFM CHART ON PAGE 4.

EASY-CLEANING.


THE MAGIC LUNG® BLOWER HOUSING SNAPS APART FOR EASY CLEANING IN THE DISHWASHER OR WITH WARM SOAPY WATER. THE MAGIC LUNG® MOTOR IS ALSO ENCLOSED IN A SPECIALLY DESIGNED HOUSING TO KEEP IT OUT OF THE GREASE FLOW, THEREBY MAXIMIZING ITS OPERATIONAL PERFORMANCE. EASY TO SNAP-APART HOUSINGS AND FULLY ENCLOSED MOTORS MEAN NO HIDDEN GREASE IN HARD TO REACH AREAS BEHIND A MESH OR BAFFLE FILTER AS WITH OTHER BRANDS IN THE MARKETPLACE.

FIRE-SAFETY.

THE MAGIC LUNG® CONSTANT SPEED CENTRIFUGAL BLOWER IS DESIGNED TO LIQUEFY GREASE IN THE SEALED BLOWER HOUSING AND TO CREATE A PRESSURE BARRIER, LOWERING THE RISK OF AN ATTIC OR WALL FIRE. IN 70+ YEARS OF MANUFACTURING THIS SYSTEM, VENT-A-HOOD® HAS NEVER RECEIVED A REPORT OF AN ATTIC OR WALL FIRE WHEN THE MAGIC LUNG® HAS BEEN IN USE.

POWERFUL.

MAGIC LUNG® BLOWERS CAN BE CONFIGURED TO PROVIDE THE POWER YOU NEED FOR EVEN THE MOST DEMANDING COOKING SURFACE. EACH HIGHLY EFFICIENT MAGIC LUNG® BLOWER SUPPLIES 300 CFM OF AIR MOVEMENT; YOU CAN COMBINE MULTIPLE BLOWERS IN A SINGLE VENT-A-HOOD® RANGE HOOD TO CREATE THE PERFECT VENTILATION FOR YOUR COOKING SURFACE.

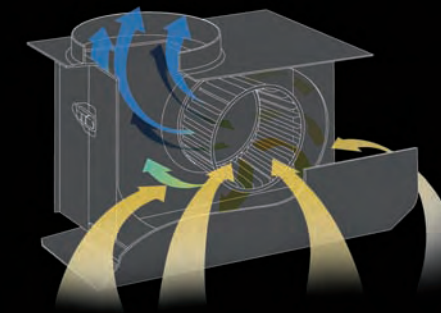

HOW QUIET IS A VENT-A-HOOD®?

THE TEST RESULTS SHOWN BELOW WERE GENERATED AT A CERTIFIED INDEPENDENT INDUSTRY TESTING LAB.* ALL TESTS WERE MEASURED AT FULL SPEED TO DEMONSTRATE THE MOST ACCURATE SOUND RATING (OTHER MANUFACTURERS MAY USE LOWER SPEEDS FOR TESTING WHICH DON'T REFLECT ACCURATE OPERATING SOUND LEVELS.)

300 CFM MAGIC LUNG BLOWER®	5.4 SONES (AT HIGH SPEED)
600 CFM MAGIC LUNG BLOWER®	6.5 SONES (AT HIGH SPEED)
900 CFM MAGIC LUNG BLOWER®	6.3 SONES (AT HIGH SPEED)
1200 CFM MAGIC LUNG BLOWER®	6.6 SONES (AT HIGH SPEED)

VENT-A-HOOD'S® MAGIC LUNG® "MULTI-BLOWER" TECHNOLOGY ALLOWS CFM TO DOUBLE, TRIPLE, OR QUADRUPLE WITH VERY LITTLE EFFECT ON SOUND LEVELS.

*RATINGS IN ACCORDANCE WITH THE STANDARD TEST CODE BY THE ENERGY SYSTEMS LABORATORY OF THE TEXAS ENGINEERING EXPERIMENT STATION.

THE PERFORMANCE GUARANTEED MAGIC LUNG®.

VENT-A-HOOD® HAS LONG BEEN THE MOST RESPECTED NAME IN VENTILATION. OUR PRODUCTS ARE GUARANTEED TO WORK AS LONG AS THEY ARE SPECIFIED AND INSTALLED PROPERLY.* WE STAND ON 70+ YEARS OF MANUFACTURING HIGH QUALITY VENTILATION PRODUCTS. OUR FAMILY IS DEVOTED TO YOUR SATISFACTION.

WILLIAM MILES WOODALL- III
CEO - VENT-A-HOOD LTD.
3RD GENERATION FAMILY MEMBER

*FOR DETAILED GUARANTEE INFORMATION, CONTACT: CUSTOMER_SERVICE@VENTAHOOD.COM

HOW TO CHOOSE YOUR VENT-A-HOOD® RANGE HOOD

ANSWER THE FOLLOWING QUESTIONS TO FOCUS YOUR SEARCH ON THE VENT-A-HOOD® THAT IS APPROPRIATE FOR YOUR NEEDS. YOU WILL MATCH YOUR COOKING EQUIPMENT WITH THE CORRECT VENTILATION. THE SPECIFICATIONS BELOW APPLY TO RESIDENTIAL COOKING EQUIPMENT ONLY. ADDITIONAL SPECIFICATION CONSIDERATIONS MAY BE REQUIRED FOR OUTDOOR COOKING EQUIPMENT.

WHAT TYPE OF COOKING EQUIPMENT DO YOU HAVE?

- STANDARD ELECTRIC
 STANDARD GAS
 PROFESSIONAL-STYLE

WHAT TYPE OF HOOD DO YOU NEED?

- UNDER-CABINET
 WALL-MOUNT
 ISLAND

- LINER INSERT (WALL-MOUNT OR ISLAND; SEE PAGE 28 FOR ADDITIONAL INFORMATION)

WHAT SIZE OF MAGIC LUNG® BLOWER DO YOU REQUIRE?

THERE'S NO EXACT SCIENCE FOR DETERMINING YOUR BLOWER REQUIREMENTS—IF YOU NEVER HAVE ALL YOUR BURNERS ON AT ONCE, YOU DON'T NEED TO BUY EXCESSIVE CAPACITY. TO LOCATE ON THE FOLLOWING CHART THE MAGIC LUNG® BLOWER THAT'S APPROPRIATE FOR YOU, CONSIDER THE TYPE OF HOOD YOU WANT, THE TYPE OF EQUIPMENT YOU USE, AND YOUR COOKING HABITS—WHETHER YOU USE ALL OR ONLY PART OF THE BTU/WATT VALUE OF THE COOKING EQUIPMENT.

HOOD TYPE	COOKING EQUIPMENT	MULTI-BURNER COOKTOP RATING* (BTU/WATTS)	BBO, WOK OR GRIDDLE (BTU/WATTS)	MAGIC LUNG® BLOWER(S)*	EQUIVALENT CFM
WALL-MOUNT OR UNDER-CABINET	STANDARD ELECTRIC	20,000-30,000 BTU 12,000 WATTS	20,000 BTU 12,000 WATTS	300 CFM (B100 SINGLE BLOWER)	450 CFM
UNDER-CABINET	STANDARD GAS	40,000-60,000 BTU 24,000 WATTS	40,000 BTU 24,000 WATTS	600 CFM (B200 DUAL BLOWER)	900 CFM
WALL-MOUNT	STANDARD GAS OR PROFESSIONAL-STYLE	40,000-60,000 BTU 24,000 WATTS	40,000 BTU 24,000 WATTS	600 CFM (B200 DUAL BLOWER)	900 CFM
WALL-MOUNT	HEAVY-USAGE PROFESSIONAL-STYLE	60,000-90,000 BTU 36,000 WATTS	60,000 BTU 36,000 WATTS	900 CFM (ONE B100 SINGLE BLOWER PLUS ONE B200 DUAL BLOWER)	1350 CFM
WALL-MOUNT	48" OR 60" PROFESSIONAL-STYLE	80,000-120,000 BTU 48,000 WATTS	80,000 BTU 48,000 WATTS	1200 CFM (TWO B200 DUAL BLOWERS)	1800 CFM
ISLAND	STANDARD ELECTRIC, GAS OR PROFESSIONAL-STYLE	40,000-60,000 BTU 24,000 WATTS	40,000 BTU 24,000 WATTS	600 CFM (T200 ISLAND DUAL BLOWER)	900 CFM
ISLAND	HEAVY-USAGE PROFESSIONAL-STYLE	80,000-120,000 BTU 48,000 WATTS	80,000 BTU 48,000 WATTS	1200 CFM (T400 ISLAND CLUSTER BLOWER)	1800 CFM

BECAUSE THE MAGIC LUNG® USES CENTRIFUGAL FILTRATION UNITS RATHER THAN CONVENTIONAL BAFFLE OR MESH FILTERS, THE MAGIC LUNG® BLOWER CAN HANDLE COOKING EQUIPMENT WITH HIGHER CUBIC FEET PER MINUTE (CFM) REQUIREMENTS AND CAN DELIVER EQUIVALENT CFM MUCH MORE EFFICIENTLY THAN OTHER FILTRATION SYSTEMS. WHEN COMPARING THE MAGIC LUNG® WITH BLOWER UNITS MADE BY OTHER MANUFACTURERS, USE THE "EQUIVALENT CFM."

*MULTI-BURNER COOKTOPS ARE NOT GENERALLY OPERATED AT FULL CAPACITY, WHEREAS BBQS, WOKS AND GRIDDLES ARE OFTEN OPERATED AT FULL CAPACITY.

MODEL NUMBER DECODING:

HERE IS AN EXPLANATION OF OUR MODEL NUMBER CODES: EX. PRH18-236 SS

- IN THIS EXAMPLE, PR IS THE MODEL. OTHER EXAMPLES ARE SL, EP, ETC.
- H MEANS THE HOOD HAS HALOGEN LIGHTS. NO H MEANS THE HOOD HAS FLUORESCENT LIGHTS.
- 18 IS THE HOOD HEIGHT IN INCHES.
- 2 IS THE NUMBER OF BLOWER MOTORS.
- 36 IS THE HOOD WIDTH IN INCHES.
- SS DESIGNATES THE FINISH.
SS — STAINLESS STEEL
BL — PAINTED BLACK
OL — OVERLAY, EITHER REAL BRASS, REAL COPPER OR HAMMERED COPPER.*

*IT IS NECESSARY TO SPECIFY EXTERIOR METAL AND INTERIOR COLOR WHEN THE FINISH IS OVERLAY.

WHAT HEIGHT HOOD DO YOU NEED?

THE RECOMMENDED MOUNTING HEIGHT OF VENT-A-HOOD® RANGE HOODS VARIES BY MODEL*. UNDER CABINET HOODS REQUIRE LESS SPACE (24" - 27" FOR A 9" HOOD, 21" - 24" FOR A 6" HOOD). WALL MOUNT HOODS (DEPENDING ON THE MODEL) MOUNT ANYWHERE FROM 21" - 30" FROM THE COOKING SURFACE. ISLAND HOODS MOUNT ANYWHERE FROM 27" - 30". BE SURE TO ACCOUNT FOR THE HEIGHT OF ANYTHING THAT WILL BE ABOVE YOUR VENT-A-HOOD® RANGE HOOD, SUCH AS A SOFFIT, A CABINET, OR A DUCT COVER. VENT-A-HOOD® CAN MAKE A DUCT COVER FOR ANY HEIGHT CEILING.

*NOTE- EXCEEDING RECOMMENDED MOUNTING HEIGHT MAY COMPROMISE PERFORMANCE.

- 6" (UNDER-CABINET)
 18" WALL-MOUNT OR ISLAND
 OTHER
- 9" (UNDER-CABINET)
 30" WALL-MOUNT OR ISLAND

WHAT WIDTH HOOD DO YOU NEED?

WHEREVER POSSIBLE, THE WIDTH OF UNDER-CABINET AND WALL-MOUNT HOODS SHOULD OVERLAP THE BURNERS 3"- 6" ON EACH SIDE. ISLAND HOODS MUST OVERLAP BY 3"- 6" FOR PROPER PERFORMANCE. VENT-A-HOOD® RANGE HOODS CAN BE MANUFACTURED TO WIDTHS WITHIN 1/8".

- 30"
 36"
 42"
 48"
- 54"
 60"
 66"
 OTHER


WHAT DEPTH HOOD DO YOU NEED?

THE HOOD SHOULD BE DEEP ENOUGH TO FULLY COVER ALL BURNERS.


- UNDER-CABINET
 19-1/2" OR 21" (STANDARD)
 OTHER
- WALL-MOUNT
 24" (FOR STANDARD AND MOST PROFESSIONAL-STYLE COOKING EQUIPMENT)
 27" (FOR SOME PROFESSIONAL-STYLE COOKING EQUIPMENT)
 OTHER
- ISLAND HOOD
 27" (FOR STANDARD COOKING EQUIPMENT)
 30" (FOR PROFESSIONAL-STYLE COOKING EQUIPMENT)
 OTHER

WHAT STYLE OF VENT-A-HOOD® RANGE HOOD DO YOU DESIRE?


ON THE FOLLOWING PAGES OF THIS CATALOG, YOU CAN SEE A VARIETY OF VENT-A-HOOD RANGE HOOD STYLES AND MODELS. UNDER-CABINET HOODS ARE SHOWN ON PAGES 6-9, WALL-MOUNT HOODS ON PAGES 10-19, ISLAND HOODS ON PAGES 20-21, CONTEMPORARY WALL-MOUNT HOODS ON PAGES 22-25, CONTEMPORARY ISLAND HOODS ON PAGES 26-27 AND LINER INSERTS ON PAGES 28-31. EXAMPLES OF SPECIAL-ORDER HOODS ARE AVAILABLE ON PAGES 32-33. OPTIONS, DECORATIVE FEATURES, AND FINISHES ARE DESCRIBED ON PAGES 34-35.



PROFESSIONAL



EMERALD




NOUVEAU PRO

FOR MORE DETAILED SPECIFICATION INFORMATION, REFERENCE OUR SEPARATE SPECIFICATION CATALOG OR VISIT OUR WEB SITE AT WWW.VENTAHOOD.COM



UNDER CABINET SLH6-K


- COMPACT DESIGN WITH PATENTED EMERALD LIP IS THE IDEAL UPGRADE REPLACEMENT HOOD
- INCLUDES THE K SERIES BLOWER SYSTEM, WHICH IS PERFECT FOR LIGHT TO MODERATE COOKING (SOUND RATING IS 7.4 SONES AT HIGH SPEED)
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. NOT AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR
- AVAILABLE IN POPULAR PAINT COLORS (BISCUIT, BLACK, GUNSMOKE AND WHITE ONLY) AND STAINLESS STEEL
- DESIGNED FOR EITHER TOP VENT OR BACK VENT INSTALLATIONS
- RECOMMENDED MOUNTING HEIGHT IS 21" - 24" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 6" TALL, 19 1/2" BOTTOM DEPTH, 12" TOP DEPTH, 2" TALL FRONT LIP
- 250 CFM WIDTHS 24", 30", 36" AND 42"



UNDER CABINET PRH9

- LINEAR STYLING PERFECTLY ACCENTS THE PROFESSIONAL-STYLED KITCHEN
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS, STAINLESS STEEL, REAL BRASS, REAL COPPER OR HAMMERED COPPER
- RECOMMENDED MOUNTING HEIGHT IS 24" - 27" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 9" TALL, 21" BOTTOM DEPTH, 12" TOP DEPTH, 2" TALL FRONT LIP
- 300 CFM WIDTHS 30", 36", 42" AND 48"
- 600 CFM WIDTHS 30", 36", 42" AND 48"
- 900 CFM WIDTHS 42" AND 48"
- 1200 CFM WIDTH 48"

ALSO AVAILABLE
IN CUSTOM SIZES






UNDER CABINET NPH9

- ROUNDED FRONT LIP PROVIDES A MODERN VISUAL IMPACT
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS, STAINLESS STEEL, REAL BRASS, REAL COPPER OR HAMMERED COPPER
- RECOMMENDED MOUNTING HEIGHT IS 24" - 27" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 9" TALL, 21" BOTTOM DEPTH, 12" TOP DEPTH, 3" TALL FRONT LIP
- 300 CFM WIDTHS
30", 36", 42" AND 48"
- 600 CFM WIDTHS
30", 36", 42" AND 48"
- 900 CFM WIDTHS
42" AND 48"
- 1200 CFM WIDTH
48"


ALSO AVAILABLE
IN CUSTOM SIZES



UNDER CABINET SLH9

- SOFT CUT CORNERS OF THE PATENTED EMERALD LIP YIELD A CONTEMPORARY FEEL
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS, STAINLESS STEEL, REAL BRASS, REAL COPPER OR HAMMERED COPPER
- RECOMMENDED MOUNTING HEIGHT IS 24" - 27" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 9" TALL, 21" BOTTOM DEPTH, 12" TOP DEPTH, 2" TALL FRONT LIP
- 300 CFM WIDTHS
30", 36", 42" AND 48"
- 600 CFM WIDTHS
30", 36", 42" AND 48"
- 900 CFM WIDTHS
42" AND 48"
- 1200 CFM WIDTH
48"

ALSO AVAILABLE
IN CUSTOM SIZES






WALL MOUNT PRHi8

- LINEAR STYLING PERFECTLY ACCENTS THE PROFESSIONAL-STYLED KITCHEN
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS, STAINLESS STEEL, REAL BRASS, REAL COPPER OR HAMMERED COPPER
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 8', 9', AND 10' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 18" TALL, 24" BOTTOM DEPTH, 12" TOP DEPTH, 6" TALL FRONT LIP, 27" BOTTOM DEPTH IS ALSO AVAILABLE
- 300 CFM WIDTHS 30", 36", 42" AND 48"
- 600 CFM WIDTHS 30", 36", 42", 48" AND 54"
- 900 CFM WIDTHS 42", 48", 54" AND 60"
- 1200 CFM WIDTHS 48", 54", 60" AND 66"


ALSO AVAILABLE IN CUSTOM SIZES




WALL MOUNT NPHi8

- ROUNDED FRONT LIP PROVIDES A MODERN VISUAL IMPACT
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS, STAINLESS STEEL, REAL BRASS, REAL COPPER OR HAMMERED COPPER
- INCLUDES WARMING LIGHT BAR (HEAT LAMP BULBS NOT INCLUDED). SEE PAGE 34 FOR MORE INFORMATION
- SHOWN WITH OPTIONAL WARMING SHELF ASSEMBLY (SOLD SEPARATELY). SEE PAGE 34 FOR MORE INFORMATION
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 8', 9', AND 10' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 18" TALL, 24" BOTTOM DEPTH, 12" TOP DEPTH, 4" TALL FRONT LIP, 27" BOTTOM DEPTH IS ALSO AVAILABLE
- 300 CFM WIDTHS 30", 36", 42" AND 48"
- 600 CFM WIDTHS 30", 36", 42", 48" AND 54"
- 900 CFM WIDTHS 42", 48", 54" AND 60"
- 1200 CFM WIDTHS 48", 54", 60" AND 66"

ALSO AVAILABLE IN CUSTOM SIZES




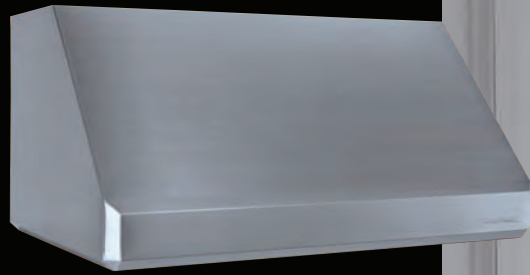

WALL MOUNT SLH18

- SOFT CUT CORNERS OF THE PATENTED EMERALD LIP YIELD A CONTEMPORARY FEEL
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS, STAINLESS STEEL, REAL BRASS, REAL COPPER OR HAMMERED COPPER
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 8', 9', AND 10' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 18" TALL, 24" BOTTOM DEPTH, 12" TOP DEPTH, 3" TALL FRONT LIP. 27" BOTTOM DEPTH IS ALSO AVAILABLE
- 300 CFM WIDTHS
30", 36", 42" AND 48"
- 600 CFM WIDTHS
30", 36", 42", 48"
AND 54"
- 900 CFM WIDTHS
42", 48", 54" AND 60"
- 1200 CFM WIDTHS
48", 54", 60" AND 66"

ALSO AVAILABLE
IN CUSTOM SIZES






EURO STYLE WALL MOUNT PDH14

- LINEAR STYLING PERFECTLY ACCENTS THE PROFESSIONAL-STYLED KITCHEN
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS, STAINLESS STEEL, REAL BRASS, REAL COPPER OR HAMMERED COPPER
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 7', 8', AND 9' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 24" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 14" TALL, 21" BOTTOM DEPTH, 10" X 10" TOP, 2 5/8" TALL FRONT LIP
- 300 CFM WIDTHS
30", 36", 42" AND 48"
- 600 CFM WIDTHS
36", 42" AND 48"


ALSO AVAILABLE
IN CUSTOM SIZES



EURO STYLE WALL MOUNT SLDH14

- SOFT CUT CORNERS OF THE PATENTED EMERALD LIP YIELD A CONTEMPORARY FEEL
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS AND STAINLESS STEEL. NOT AVAILABLE IN REAL BRASS, REAL COPPER OR HAMMERED COPPER
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 7', 8', AND 9' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 24" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 14" TALL, 21" BOTTOM DEPTH, 10" X 10" TOP, 2" TALL FRONT LIP
- 300 CFM WIDTHS
30", 36", 42" AND 48"
- 600 CFM WIDTHS
36", 42" AND 48"

ALSO AVAILABLE
IN CUSTOM SIZES






EURO STYLE WALL MOUNT EPH18/EPH18

- LINEAR STYLING PERFECTLY ACCENTS THE PROFESSIONAL STYLED KITCHEN
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS, STAINLESS STEEL, REAL BRASS, REAL COPPER OR HAMMERED COPPER
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 8', 9', AND 10' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 18" TALL, 24" BOTTOM DEPTH, 4" TALL FRONT LIP. 27" BOTTOM DEPTH IS ALSO AVAILABLE

EPH18
600 CFM WIDTHS
36", 42" AND 48"
TOP DIMENSIONS
12" WIDE X 12" DEEP

EPH18
900 CFM WIDTHS
42", 48", 54", 60"
AND 66"
1200 CFM WIDTHS
54", 60" AND 66"
TOP DIMENSIONS
26" WIDE X 14" DEEP

ALSO AVAILABLE
IN CUSTOM SIZES



EPH18



Photographer: Dana Wheelock Photography




EURO STYLE WALL MOUNT NEPH18/NEPTH18

- ROUNDED FRONT LIP PROVIDES A MODERN VISUAL IMPACT
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS, STAINLESS STEEL, REAL BRASS, REAL COPPER OR HAMMERED COPPER
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 8', 9', AND 10' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 18" TALL, 24" BOTTOM DEPTH, 4" TALL FRONT LIP. 27" BOTTOM DEPTH IS ALSO AVAILABLE

NEPH18
600 CFM WIDTHS
36", 42", AND 48"
TOP DIMENSIONS
12" WIDE X 12" DEEP

NEPTH18
900 CFM WIDTHS
42", 48", 54", 60",
AND 66"
1200 CFM WIDTHS
54", 60", AND 66"
TOP DIMENSIONS
26" WIDE X 14" DEEP

ALSO AVAILABLE
IN CUSTOM SIZES



NEPH18





EURO STYLE WALL MOUNT SEPHI8/SEPTI8

- SOFT CUT CORNERS OF THE PATENTED EMERALD LIP YIELD A CONTEMPORARY FEEL
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS AND STAINLESS STEEL. NOT AVAILABLE IN REAL BRASS, REAL COPPER OR HAMMERED COPPER
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 8', 9', AND 10' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 18" TALL, 24" BOTTOM DEPTH, 3" TALL FRONT LIP. 27" BOTTOM DEPTH IS ALSO AVAILABLE

• SEPHI8

600 CFM WIDTHS
36", 42", AND 48"

TOP DIMENSIONS
12" WIDE X 12" DEEP


• SEPTI8

900 CFM WIDTHS
42", 48", 54", 60",
AND 66"

1200 CFM WIDTHS
54", 60", AND 66"

TOP DIMENSIONS
26" WIDE X 14" DEEP

ALSO AVAILABLE
IN CUSTOM SIZES



SEPTI8





**EURO STYLE
ISLAND
PYDH18/EPIH18
EPITH18**

- LINEAR STYLING PERFECTLY ACCENTS THE PROFESSIONAL-STYLED KITCHEN
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS, STAINLESS STEEL, REAL BRASS, REAL COPPER, OR HAMMERED COPPER
- SHOWN WITH MATCHING ISLAND DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 8', 9', AND 10' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT

• 18" TALL, 4" TALL FRONT LIP

PYDH18

600 CFM WIDTHS
36", 42", AND 48"

TOP DIMENSIONS
12" WIDE X 12" DEEP
BOTTOM DEPTH - 27"

EPIH18

600 CFM WIDTHS
36", 42", AND 48"


TOP DIMENSIONS
12" WIDE X 12" DEEP
BOTTOM DEPTH - 30"

EPITH18

1200 CFM WIDTHS
48", 54", 60", AND 66"

TOP DIMENSIONS
15" WIDE X 15" DEEP
BOTTOM DEPTH - 30"

ALSO AVAILABLE
IN CUSTOM SIZES



**EURO STYLE
ISLAND
ISDH18/SEPIH18
SEPITH18**

- SOFT CUT CORNERS OF THE PATENTED EMERALD LIP YIELD A CONTEMPORARY FEEL
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS AND STAINLESS STEEL. NOT AVAILABLE IN REAL BRASS, REAL COPPER OR HAMMERED COPPER
- SHOWN WITH MATCHING ISLAND DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 8', 9', AND 10' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT

• 18" TALL, 3" TALL FRONT LIP

ISDH18

600 CFM WIDTHS
36", 42", AND 48"

TOP DIMENSIONS
12" WIDE X 12" DEEP
BOTTOM DEPTH - 27"

SEPIH18

600 CFM WIDTHS
36", 42", AND 48"


TOP DIMENSIONS
12" WIDE X 12" DEEP
BOTTOM DEPTH - 30"


SEPITH18

1200 CFM WIDTHS
48", 54", 60", AND 66"

TOP DIMENSIONS
15" WIDE X 15" DEEP
BOTTOM DEPTH - 30"


ALSO AVAILABLE
IN CUSTOM SIZES



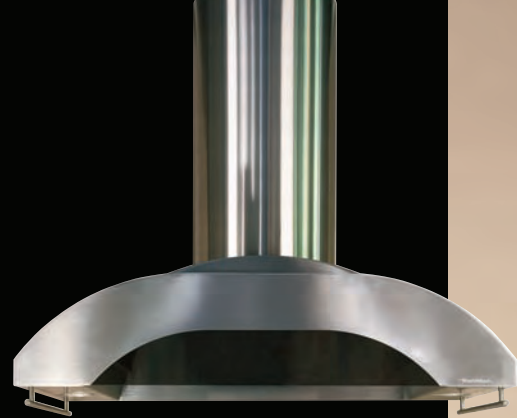

CONTEMPORARY WALL MOUNT GTH

- COMPACT GLASS FRONT DESIGN WITH A CONTEMPORARY FEEL
- INCLUDES THE K SERIES BLOWER SYSTEM, WHICH IS PERFECT FOR LIGHT TO MODERATE COOKING
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. NOT AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR
- AVAILABLE IN STAINLESS STEEL ONLY
- INCLUDES FIXED LENGTH STAINLESS STEEL RAIL
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 7', 8', AND 9' CEILING HEIGHTS OR IN CUSTOM SIZES. DUCT COVER IS 12" X 12" WITH A ROUNDED FRONT
- RECOMMENDED MOUNTING HEIGHT IS 24" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 8" TALL, 21" BOTTOM DEPTH, 1 3/4" TALL LIP ON SIDES
- 250 CFM WIDTH 36"




Designer: Celia Visser, Celia Visser Design



CONTEMPORARY WALL MOUNT ZTH

- GLASS FRONT DESIGN WITH A CONTEMPORARY FEEL FOR USE OVER MOST PROFESSIONAL STYLE RANGES
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. NOT AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR
- AVAILABLE IN STAINLESS STEEL ONLY
- INCLUDES FIXED LENGTH STAINLESS STEEL RAIL
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY) AVAILABLE IN STANDARD SIZES FOR 7', 8', AND 9' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 12" TALL, 24" BOTTOM DEPTH, 1" TALL LIP ON SIDES
- 600 CFM WIDTHS 36", 42", AND 48" DUCT COVER IS 12" WIDE X 12" DEEP WITH A ROUNDED FRONT
- 900 CFM WIDTH 54" DUCT COVER IS 28" WIDE X 12" DEEP WITH A ROUNDED FRONT



Designer: Ed Eames, Ed Eames & Associates
Photographer: Michael Conroy



CONTEMPORARY WALL MOUNT XLH12

- UNIQUE ROUNDED SHAPE CREATES A "ONE-OF-A-KIND" STATEMENT
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. NOT AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR
- AVAILABLE IN STAINLESS STEEL ONLY
- INCLUDES BRASS, COPPER, STAINLESS STEEL, OR MIRROR STAINLESS STEEL LIP TREATMENT
- SHOWN ABOVE AND AT RIGHT WITH MATCHING 8" ROUND FINISHED ROUND DUCT (SOLD SEPARATELY) WITH ROUND DUCT COLLARS (SOLD SEPARATELY, SQUARE DUCT COLLARS ALSO AVAILABLE) OR MATCHING 10" X 10" WALL MOUNT DUCT COVER (SHOWN BELOW RIGHT, SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 7', 8', AND 9' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 24" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 12" TALL, 21" BOTTOM DEPTH, 2" TALL FRONT LIP
- 600 CFM WIDTHS
30" AND 36"




XLH12 WITH OPTIONAL
10" X 10" DUCT COVER




CONTEMPORARY WALL MOUNT CWLH9

- MULTI-LAYERED VISUAL EFFECT IS THE IDEAL ADDITION TO ANY CONTEMPORARY KITCHEN
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. NOT AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS AND STAINLESS STEEL. NOT AVAILABLE IN REAL BRASS, REAL COPPER OR HAMMERED COPPER
- INCLUDES STAINLESS STEEL GALLEY RAIL
- SHOWN WITH MATCHING WALL MOUNT DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 7', 8', AND 9' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 27" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 9" TALL, 21" BOTTOM DEPTH, 4 1/2" TALL FRONT LIP
- 300 CFM WIDTHS
30", 36", 42", AND 48"
DUCT COVER IS 12" WIDE X 12" DEEP
- 600 CFM WIDTHS
36", 42", AND 48"
DUCT COVER IS 12" WIDE X 12" DEEP
- 900 CFM WIDTHS
54", AND 60"
DUCT COVER IS 26" WIDE X 12" DEEP
- 1200 CFM WIDTHS
60", AND 66"
DUCT COVER IS 34" WIDE X 12" DEEP
- ALSO AVAILABLE IN CUSTOM SIZES




Designer: Ed Eames, Ed Eames & Associates
Photographer: Michael Conroy

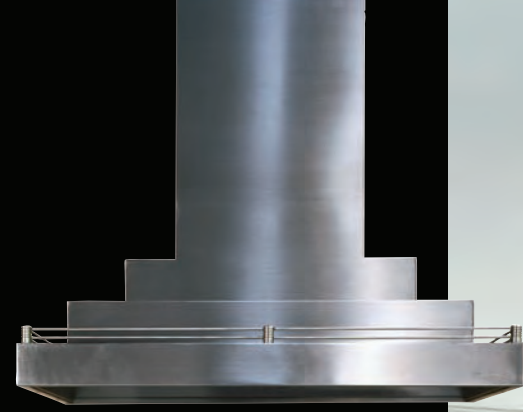


CONTEMPORARY ISLAND CILH9

- MULTI-LAYERED VISUAL EFFECT IS THE IDEAL ADDITION TO ANY CONTEMPORARY KITCHEN
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. NOT AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS AND STAINLESS STEEL. NOT AVAILABLE IN REAL BRASS, REAL COPPER OR HAMMERED COPPER
- INCLUDES STAINLESS STEEL GALLEY RAIL
- SHOWN WITH MATCHING ISLAND DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 7', 8', AND 9' CEILING HEIGHTS OR IN CUSTOM SIZES. DUCT COVERS ARE 20" WIDE X 14" DEEP AT THE BOTTOM, 14" WIDE X 14" DEEP AT THE TOP
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 9" TALL, 30" BOTTOM DEPTH, 4 1/2" TALL FRONT LIP
- 600 CFM WIDTHS 42", 48", AND 54" SINGLE DUCT COVER
- 1200 CFM WIDTHS 60", AND 66" DUAL DUCT COVERS

ALSO AVAILABLE
IN CUSTOM SIZES




CILH9
WITH DUAL DUCT COVERS

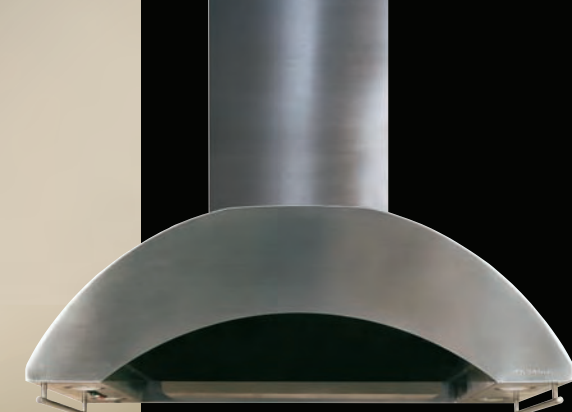

CONTEMPORARY ISLAND IZTH

- GLASS FRONT DESIGN WITH A CONTEMPORARY FEEL FOR USE OVER MOST PROFESSIONAL STYLE RANGES
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. NOT AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR
- AVAILABLE IN STAINLESS STEEL ONLY
- INCLUDES FIXED LENGTH STAINLESS STEEL RAIL
- SHOWN WITH MATCHING ISLAND DUCT COVER (SOLD SEPARATELY), AVAILABLE IN STANDARD SIZES FOR 7', 8', AND 9' CEILING HEIGHTS OR IN CUSTOM SIZES
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 14" TALL, 30" BOTTOM DEPTH, 1" TALL LIP ON SIDES
- 600 CFM WIDTHS 42", AND 48" DUCT COVER IS 18" WIDE X 15" DEEP
- 1200 CFM WIDTHS 54", 60", AND 66" DUCT COVER IS 22" WIDE X 15" DEEP



Designer: Sue Gillbanks
Photographer: Kallan McLeod



Publisher: Trends Publishing International
 Architect: John Macdonald
 MacDonald & Associates (Lexington, MA)
 Photographer: Sam Gray



Publisher: Trends Publishing International
 Architect: Grant Kirkpatrick, Michael Eserts
 KAA Design Group (Los Angeles)
 Photographer: Kallan MacLeod





Publisher: Trends Publishing International
 Architect: Richard C Lundin
 AIA, 3 Studios (Minneapolis)
 Photographer: Real images

LINER FEATURES

VENT-A-HOOD® LINER INSERTS ARE MOUNTED INSIDE OF DECORATIVE WOOD, PLASTER, TILE, OR METAL HOODS.

VENT-A-HOOD® STANDARD LINER INSERTS ARE UNSURPASSED BECAUSE THEY ARE:

- PRE-WIRED, PRE-ASSEMBLED, READY TO INSTALL
- READILY AVAILABLE
- LESS EXPENSIVE THAN CUSTOM MADE LINER INSERTS
- AVAILABLE IN POPULAR PAINT COLORS OR STAINLESS STEEL
- EQUIPPED WITH HALOGEN OR FLUORESCENT LIGHTING

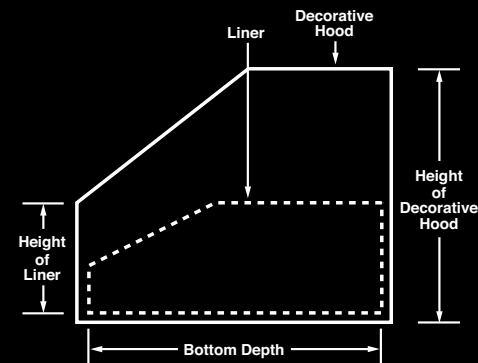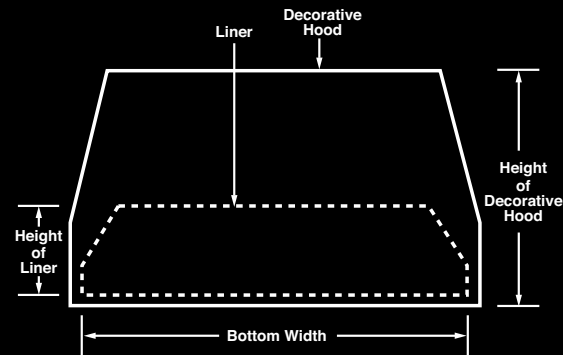


THE ONLY PLACE WHERE THE LINER INSERT AND THE OUTSIDE ENCLOSURE MUST MEET AND FIT IS AT THE BOTTOM EDGE OF THE METAL LINER INSERT, IN BOTH WIDTH AND DEPTH – THE HEIGHT OF A LINER INSERT CAN BE MUCH SHORTER THAN THE HEIGHT OF A DECORATIVE HOOD.

VENT-A-HOOD® LINER INSERTS ARE MANUFACTURED IN MANY POPULAR STANDARD SIZES FOR WALL MOUNT OR ISLAND APPLICATIONS. IN ADDITION, VENT-A-HOOD® CAN MANUFACTURE A CUSTOM LINER INSERT TO FIT MOST ANY APPLICATION.

WALL MOUNT LINER INSERT KHSLD

- LINER INSERT WITH A COMPACT DESIGN FOR USE IN NARROWER DEPTH INSTALLATIONS
- INCLUDES THE K SERIES BLOWER SYSTEM, WHICH IS PERFECT FOR LIGHT TO MODERATE COOKING (SOUND RATING IS 7.4 SONES AT HIGH SPEED)
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. NOT AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR
- AVAILABLE IN POPULAR PAINT COLORS (BISCUIT, BLACK, GUNSMOKE AND WHITE ONLY) AND STAINLESS STEEL
- DESIGNED FOR EITHER TOP VENT OR BACK VENT INSTALLATIONS
- RECOMMENDED MOUNTING HEIGHT IS 21" – 24" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 6" TALL, 18" BOTTOM DEPTH, 16 1/2" TOP DEPTH, 2 1/2" TALL FRONT LIP
- 250 CFM WIDTHS
 28 3/8", 34 3/8", AND 40 3/8"
 TOP WIDTH 5" LESS THAN BOTTOM WIDTH



WALL MOUNT LINER INSERT BHSLD/BHPSLD BHPSLB

- LINER INSERTS DESIGNED TO FIT MOST ANY APPLICATION
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS AND STAINLESS STEEL
- RECOMMENDED MOUNTING HEIGHT IS 24" - 27" (BHSLD) OR 27" - 30" (BHPSLB AND BHPSLD) ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT

• 12" TALL, 12" TOP DEPTH, 3" TALL FRONT LIP

• BHSLD

300 CFM WIDTHS
28 3/8", 34 3/8", AND 40 3/8"

600 CFM WIDTHS
28 3/8", 34 3/8", AND 40 3/8"

TOP WIDTH 6" LESS THAN BOTTOM WIDTH
19 1/4" BOTTOM DEPTH

• BHPSLD

600 CFM WIDTHS
28 3/8", 34 3/8", 40 3/8", 46 3/8",
AND 52 3/8"

900 CFM WIDTHS
46 3/8", 52 3/8", AND 58 3/8"

1200 CFM WIDTHS
52 3/8", 58 3/8", AND 64 3/8"


TOP WIDTH 6" LESS THAN BOTTOM WIDTH
22 1/2" BOTTOM DEPTH

• BHPSLB

1200 CFM WIDTHS
46 3/8"
22 1/2" BOTTOM
DEPTH


TOP WIDTH IS THE
SAME AS BOTTOM
WIDTH

CUSTOM LINER
INSERTS ALSO
AVAILABLE



BHSLD

BHPSLD
BHPSLB



BHSLD



ISLAND LINER INSERT THSLE/THPSLE

- LINER INSERTS DESIGNED TO FIT MOST ANY APPLICATION
- INCLUDES THE MAGIC LUNG® BLOWER SYSTEM
- 50 WATT HALOGEN LIGHTS FEATURE A DUAL SWITCH FOR DIMMING TO 25 WATTS. ALSO AVAILABLE WITH FLUORESCENT LIGHTS
- EQUIPPED WITH THE SENSASOURCE® HEAT SENSOR (HALOGEN LIGHT MODELS ONLY)
- AVAILABLE IN POPULAR STANDARD OR CUSTOM PAINT COLORS AND STAINLESS STEEL
- RECOMMENDED MOUNTING HEIGHT IS 30" ABOVE THE COOKING SURFACE
- SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT
- 12" TALL, 3" TALL FRONT LIP

• THSLE

600 CFM WIDTHS
36", 42", AND 48"

TOP WIDTH 12" LESS
THAN BOTTOM WIDTH

15" TOP DEPTH
27" BOTTOM DEPTH


• THPSLE

1200 CFM WIDTHS
48", 54", 60", AND 66"

TOP WIDTH 16" LESS
THAN BOTTOM WIDTH

22" TOP DEPTH
30" BOTTOM DEPTH


CUSTOM LINER INSERTS
ALSO AVAILABLE




SPECIAL ORDER AND CUSTOMIZED RANGE HOODS

TO PERFECTLY COMPLEMENT THE STYLE OF YOUR KITCHEN, VENT-A-HOOD® OFFERS THE ADDITIONAL STYLES DESCRIBED ON THESE TWO PAGES. ADDITIONALLY, VENT-A-HOOD® HAS LONG BEEN A LEADER AT PROVIDING CUSTOMIZED SOLUTIONS FOR SPECIAL REQUIREMENTS, WHETHER MINOR MODIFICATIONS TO EXISTING PRODUCTS OR MORE SUBSTANTIAL TECHNOLOGICAL AND AESTHETIC INNOVATIONS.


UNDER-CABINET



SL6/SLH6 EMERALD
6" TALL FRONT ON THIS UNDER-CABINET HOOD PROVIDES AN IDEAL REPLACEMENT WHERE LOW CABINET HEIGHT IS A PROBLEM AND HIGH PERFORMANCE IS REQUIRED. NOTE: 9" TALL BACK. THE SLH6-K IS ALSO AVAILABLE FOR STANDARD ELECTRIC COOKING EQUIPMENT. SEE PAGE 6 FOR DETAILS.




XR9/XRH9 EXCALIBUR
UNIQUELY EUROPEAN UNDER-CABINET HOOD COMBINES A ROUNDED SHAPE WITH BOLD, BLACK BANDS. NOTE THAT BLACK BANDS ARE NOT INCLUDED IF YOU SELECT A REAL BRASS, REAL COPPER, OR HAMMERED COPPER OVERLAY.




F FLAIRLINE
TRADITIONAL UNDER-CABINET MODEL WORKS WELL IN ANY KITCHEN DESIGN. FLUORESCENT LIGHTS ONLY.


WALL-MOUNT




DA18/DAH18 FLAIRLINE
CLASSIC DESIGN OF THIS WALL-MOUNT HOOD FITS ANY KITCHEN. CHOOSE VERTICAL ENDS THAT ARE PERFECT FOR INSTALLATION BETWEEN CABINETS, OR OPTIONAL CONCAVE ENDS FOR A FRENCH COUNTRY LOOK.




PWV18/PWVH18 SLOPELINE
CLEAN SLOPE AND DEFINED FRONT LIP CREATE A TRADITIONAL WALL-MOUNT DESIGN THAT CAN HAVE EITHER VERTICAL OR OPTIONAL SLOPED ENDS FOR BETWEEN-CABINET AND FREESTANDING INSTALLATIONS.




XR18/XRH18 EXCALIBUR
BOLD, BLACK BANDS AND ROUNDED SHAPE OF THIS EUROPEAN WALL-MOUNT HOOD CREATE A UNIQUE DESIGN. NO BANDS ON A REAL BRASS, REAL COPPER OR HAMMERED COPPER OVERLAY. OPTIONAL CONVEX ENDS ARE ALSO AVAILABLE TO COMPLETE THE "BARREL SHAPE" ON ALL THREE SIDES.




TILT
TILT-OUT WALL-MOUNT HOOD IS FRONTED WITH YOUR CABINET MATERIAL TO PROVIDE VISUAL CONTINUITY OF CABINETRY. THE HOOD CAN EASILY BE PULLED OUT WHEN NEEDED AND PUSHED CLOSED WHEN NOT IN USE. FLUORESCENT LIGHTS ONLY.




CX30/CXH30 CONVEX
EUROPEAN DESIGN OF THIS ROUNDED WALL-MOUNT HOOD WORKS WELL IN ANY KITCHEN. OPTIONAL CONVEX ENDS ARE ALSO AVAILABLE TO COMPLETE THE "BARREL SHAPE" ON ALL THREE SIDES.




DA30/DAH30 FLAIRLINE
CONCAVE SHAPE ON THIS CLASSIC WALL-MOUNT DESIGN LOOKS GREAT IN ANY KITCHEN. CHOOSE VERTICAL ENDS THAT ARE PERFECT FOR INSTALLATION BETWEEN CABINETS, OR OPTIONAL CONCAVE ENDS FOR A FRENCH COUNTRY LOOK.



PWV30/PWVH30 SLOPELINE
CLEAN SLOPE AND DEFINED FRONT LIP CREATE A TRADITIONAL WALL-MOUNT DESIGN THAT CAN HAVE EITHER VERTICAL OR OPTIONAL SLOPED ENDS FOR BETWEEN-CABINET AND FREESTANDING INSTALLATIONS.




SL30/SLH30 EMERALD
THE POPULAR UP-TO-DATE CONTEMPORARY DESIGN OF THIS WALL-MOUNT HOOD WITH SOFT-CUT CORNERS HAVE EITHER VERTICAL OR OPTIONAL SLOPED ENDS FOR BETWEEN-CABINET AND FREESTANDING INSTALLATIONS.




CW/CWH CONTEMPORARY
STAND-ALONE HOOD CAN HAVE OPTIONAL CLIPPED OR ROUNDED CORNERS. ADD OPTIONAL OFFSETS TO CREATE A LIP. OPTIONAL SQUARE, RECTANGULAR OR ROUNDED DUCT COVERS ARE ALSO SMART ADDITIONS.


ISLAND




ISF18/ISFH18 FLAIRLINE
CONCAVE ISLAND DESIGN COMPLEMENTS ANY STYLE KITCHEN.




ISL18/ISLH18 EMERALD
SOFT-CUT CORNERS AND CONTEMPORARY DESIGN MAKE THIS A STRIKING ISLAND HOOD.




IXR18/IXRH18 EXCALIBUR
EUROPEAN DESIGN OF THIS ISLAND HOOD IS STANDARD WITH BLACK BANDS, EXCEPT ON A REAL BRASS, REAL COPPER OR HAMMERED COPPER OVERLAY.




PL18/PLH18 PROFESSIONAL
LINEAR STYLED ISLAND HOOD ACCENTS THE PROFESSIONALLY-STYLED KITCHEN.




PLX18/PLXH18 PROFESSIONAL
LINEAR STYLED ISLAND HOOD ACCENTS THE PROFESSIONALLY-STYLED KITCHEN.




PY18/PYH18 SLOPELINE
ISLAND HOOD WITH CLASSIC FREESTANDING DESIGN WORKS WELL IN ANY KITCHEN.




ICX30/ICXH30 CONVEX
UNIQUELY EUROPEAN ISLAND HOOD WITH ROUNDED SHAPE COMPLEMENTS ANY DESIGN SETTING.




ISF30/ISFH30 FLAIRLINE
CONCAVE ISLAND DESIGN COMPLEMENTS ANY STYLE KITCHEN.



ISL30/ISLH30 EMERALD
SOFT-CUT CORNERS AND CONTEMPORARY DESIGN MAKE THIS A STRIKING ISLAND HOOD.



PY30/PYH30 SLOPELINE
ISLAND HOOD WITH CLASSIC FREESTANDING DESIGN WORKS WELL IN ANY KITCHEN.



CO/COH STRAIGHTLINE
STRONGLY RECTANGULAR DESIGN WITH OR WITHOUT LIP OFFSETS (OPTIONAL) CAN BE MODIFIED WITH OPTIONAL CLIPPED OR ROUNDED CORNERS. OPTIONAL RECTANGULAR, SQUARE AND ROUND DUCT COVERS CAN NICELY COMPLEMENT THIS ISLAND HOOD.

NOTE: BASE MODEL NUMBERS WITH AN "H" HAVE HALOGEN LIGHTS; THOSE WITHOUT AN "H" HAVE FLUORESCENT LIGHTS.

9" UNDER-CABINET HOODS ARE RECOMMENDED TO MOUNT 24" - 27" ABOVE THE COOKING SURFACE AND 6" UNDER-CABINET HOODS ARE RECOMMENDED TO MOUNT 21" - 24" ABOVE THE COOKING SURFACE.

WALL-MOUNT HOODS ARE RECOMMENDED TO MOUNT 30" ABOVE THE COOKING SURFACE (EXCEPT TILT, WHICH IS RECOMMENDED TO MOUNT 23-3/4" ABOVE THE COOKING SURFACE).

ISLAND HOODS ARE RECOMMENDED TO MOUNT 30" ABOVE THE COOKING SURFACE.

ALL VENT-A-HOOD® RANGE HOODS ARE SUITABLE FOR USE IN COVERED OUTDOOR APPLICATIONS WHEN INSTALLED IN A GFCI PROTECTED BRANCH CIRCUIT.

FOR MORE DETAILED SPECIFICATION INFORMATION, SEE OUR WEB SITE, WWW.VENTAHOOD.COM

OPTIONAL FEATURES



LIGHTS

- HALOGEN LIGHTS (H MODELS) – STANDARD IN MOST MODELS SHOWN. 50-WATT HALOGEN LIGHTS COME WITH A DUAL SWITCH FOR DIMMING TO 25 WATTS. BULBS INCLUDED. FOR HOODS 24" TO 41" WIDE, TWO LIGHTS; 42" TO 53" WIDE, THREE LIGHTS; 54" TO 66" WIDE, FOUR LIGHTS. EACH ISLAND HOOD HAS FOUR HALOGEN LIGHTS, ONE IN EACH CORNER. FLUORESCENT LIGHTS ARE AVAILABLE IN PLACE OF HALOGEN LIGHTS. FLUORESCENT MODELS DO NOT HAVE SENSASOURCE.®
- WARMING LIGHT BAR (WBAR MODEL) – AVAILABLE IN MOST 18" TALL AND TALLER WALL-MOUNT HOODS. LIGHT BAR HOUSING IS MADE OF STAINLESS STEEL IN ALL HOODS. BULBS NOT INCLUDED. NOT AVAILABLE IN ISLAND OR EURO-STYLE HOODS.
- WARMING LIGHT HOUSING (WL-1 MODEL) – AVAILABLE IN SELECTED UNDER-CABINET MODELS. LIGHT HOUSING IS MADE OF STAINLESS STEEL IN ALL HOODS. BULBS NOT INCLUDED. NOT AVAILABLE IN ISLAND OR EURO-STYLE HOODS.

FINISHES

- STANDARD POWDER-COAT SMOOTH PAINT FINISHES-ALMOND, BISCUIT, GRAPHITE GRAY*, GUNSMOKE SATIN BLACK, OR WHITE. ALSO AVAILABLE IN SPECIAL COLORS; ASK FOR THE VENT-A-HOOD® CUSTOM COLOR CHART.
- TEXTURED POWDER-COAT PAINT FINISHES-BLACK RIVER, COPPER VEIN**, EMERALD VEIN, GOLD VEIN**, SILVER VEIN, OR WHITE RIVER.
- STAINLESS STEEL
- METAL OVERLAY-REAL BRASS***, REAL COPPER***, OR HAMMERED COPPER***. POWDER-COAT PAINT INTERIOR STANDARD. STAINLESS STEEL INTERIOR AVAILABLE UPON REQUEST, ADDITIONAL CHARGES WILL APPLY.

* ADDITIONAL CHARGE APPLIES.

** THESE PAINT COLORS ARE USED FOR INTERIOR COLORS ON REAL COPPER OR REAL BRASS HOODS. IF DESIRED, THE ENTIRE HOOD CAN BE PAINTED WITH THESE COLORS. ADDITIONAL CHARGES WILL APPLY.

*** REAL BRASS, REAL COPPER, AND HAMMERED COPPER HOODS OXIDIZE AND/OR TARNISH OVER TIME, AND THEREFORE WILL REQUIRE REGULAR POLISHING.



SHELVES

- WARMING SHELVES - INCLUDE FOLD-DOWN WIRE SHELVES AND STAINLESS STEEL BACKSPLASH. SHELVES ARE 14" WIDE AND 10" DEEP. BACKSPLASH IS 15" HIGH AND EXTENDS THE WIDTH OF THE HOOD. LEDGE IS 3-1/2" DEEP.



BANDS

- VERTICAL BANDS-1" OR 2" 18-GAUGE VERTICAL BANDS. BANDS ARE LAMINATED TO THE HOOD STANDARD. MAY BE ATTACHED WITH RIVET CAPS OR HEX NUTS UPON REQUEST. 1" OR 2" 24-GAUGE VERTICAL BANDS ARE ALSO AVAILABLE. BANDS ARE ATTACHED TO HOOD WITH EITHER RIVET CAPS OR HEX NUTS.
- 1/4" THICK COPPER VERTICAL BANDS. ONLY ATTACHED TO HOOD USING RIVETS.



RAILS

- POT RAIL - 5/8" DIAMETER BRASS OR CHROME RAILS ADD A BEAUTIFUL EFFECT TO ANY STYLE HOOD. SPECIFY POT RAIL FOR FRONT AND/OR SIDES ON UNDER-CABINET AND WALL-MOUNT HOODS. SPECIFY POT RAIL FOR FRONT AND/OR BACK, SIDES, OR ALL AROUND ISLAND HOODS (ISLAND HOOD ILLUSTRATED).
- STAINLESS STEEL GALLEY RAIL IS INCLUDED STANDARD ON CWLH9 AND CILH9 HOODS. ALSO AVAILABLE AS AN OPTION ON OTHER SELECTED MODELS.
- FIXED LENGTH STAINLESS STEEL RAIL IS INCLUDED STANDARD ON GTH, ZTH, AND IZTH HOODS. ALSO AVAILABLE AS AN OPTION ON OTHER SELECTED MODELS.



LIP TREATMENT

- A BAND OF ANY OF THE PAINT FINISHES OR METALS CAN ALSO BE ATTACHED TO THE FRONT OF THE LIP.
- 24-GAUGE LIP TREATMENT PARTIALLY "REVEALS" THE LIP AROUND THE BEVELED EDGES. ATTACHED TO HOOD WITH EITHER RIVET CAPS OR HEX NUTS. CANNOT BE USED IN CONJUNCTION WITH POT RAIL.
- 18-GAUGE LIP TREATMENT WITH FULL-LIP COVERAGE. LIP TREATMENT IS LAMINATED TO THE HOOD STANDARD. MAY BE ATTACHED WITH RIVET CAPS OR HEX NUTS UPON REQUEST. MAY BE USED IN CONJUNCTION WITH POT RAIL.

Vent Hood®

P.O. Box 830426
1000 N. GREENVILLE AVE.
RICHARDSON, TX 75083-0426
800-331-2492
WWW.VENTAHOOD.COM